QuickStartGuide

RIR205

www.rcaaudiovideo.com

Congratulations on purchasing your new RCA Wi-Fi Internet Radio.
Please follow these instructions to set up and start using the radio.

1 Unpack the unit

You should find the following items in the box:



Radio

Power adapter (for radio)

Wi-Fi Enabler

Power adapter (for Wi-Fi Enabler)

Ethernet cable

AM loop antenna

Quick Start Guide (this leaflet)

Setup Information Card

Additional requirements

- Broadband Internet service
- Broadband (cable/DSL) modem, usually supplied by your Internet service provider
- Ethernet router/switch/hub with available LAN port

2 Setup your **RCA Infinite Radio accounts**

To simplify setup and avoid manual configuration on the radio please complete these steps:

1. Find the Setup Information Card that contains your radio's MAC address number (MAC: 00-00-00-00-00-00) and activation PIN # (PIN: 0000). (This number is also found in the Device Info screen under the Settings menu in your radio.)

2. Using any Internet-connected computer, go to **www.rcainfiniteradio.com/setup** and follow the online instructions.
   - You will need to input your radio's MAC address and PIN # to associate your radio with your personal settings.

v1.0 (EN)

3 Connect the RCA Wi-Fi Enabler to your network

If your modem or router/hub/switch has only one LAN port and is connected to your PC, disconnect the Ethernet cable from the modem/router/hub/switch and connect it to the Enabler's LAN port.

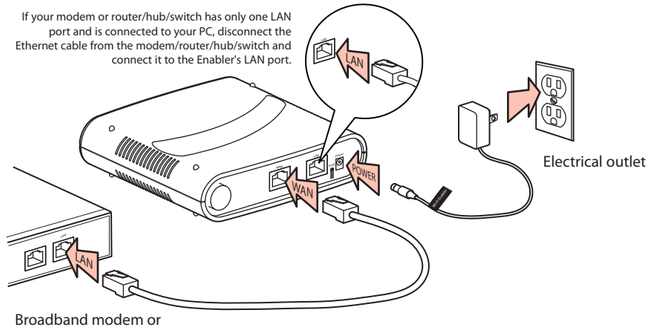

Electrical outlet

Broadband modem or
Ethernet router/hub/switch

1. Connect an ethernet cable from the Enabler's "WAN" port to a LAN port on your broadband modem or Ethernet router/hub/switch.

2. Connect the power adapter to the Enabler. Plug the adapter into an electrical outlet.

3. Make sure the power, WAN, and Wireless LEDs are on. The mode LED state will vary depending on your network configuration. If the Mode, WPS/Scan, and Wireless LEDs are blinking simultaneously, this indicates that there is a possible error in connection. Please review your connections and then press and hold the **WPS/Scan** button at the front of the Enabler for 3 seconds to rescan your network configuration. Go to **www.rcainfiniteradio.com/enablersetup** for more information.

4 Insert AAA batteries in the base of the radio

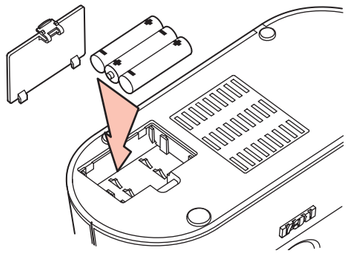

Follow the polarity markers in the battery compartment.

The batteries (not included) power the clock and alarm whenever the radio loses electricity.

5 Plug in and turn on the radio

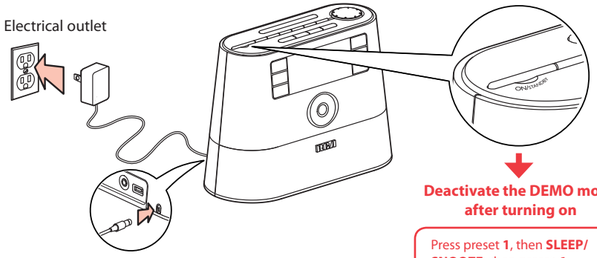

Deactivate the DEMO mode after turning on

Press preset **1**, then **SLEEP/SNOOZE**, then preset **6**.

1. **NOTE:** When you turn on the radio for the first time, it will be in **"DEMO"** mode. To exit this mode, press preset **1**, then **SLEEP/SNOOZE**, then preset **6** on top of the radio.

2. After exiting the DEMO mode, the radio displays the **Select Language** screen. Choose your preferred language.



- REMINDER: If your unit is unable to connect to your Enabler and you have already checked all the connections to the enabler, please press and hold the **WPS/Scan** button at the front of the Enabler for 3 seconds to rescan your network configuration. Go to **www.rcainfiniteradio.com/enablersetup** for more information.

3. If you did not activate your Infinite Radio accounts, or if the radio cannot get your details from the Infinite Radio server, the radio may ask for your ZIP code. Input your code.

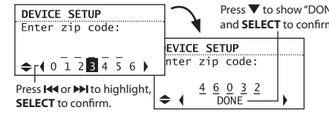
DEVICE SETUP
Enter zip code:
0 1 2 3 4 5 6
Press ▼ to show "DONE" and SELECT to confirm.
DEVICE SETUP
Enter zip code:
4 6 0 3 2
DONE
Press ⏮ or ⏭ to highlight, SELECT to confirm.

- If your radio has successfully connected to the Internet you will hear a welcome message.

Use the navigation controls to make choices and input information:

▲ - move highlight up
▼ - move highlight down
⏮ - move selection/navigate left
⏭ - move selection/navigate right
SELECT - confirm selected option or character

When inputting characters, press ▲ or ▼ to choose among uppercase, lowercase, numeric, or special characters.
To insert spaces or correct mistakes, press ▼ to display the Commands list and then press ⏮ or ⏭ to choose the desired command.

Learn more about your Internet Radio

Read the user manual (download from www.rcainfiniteradio.com) for more information on the player's features, safety and warranty information, and answers to Frequently Asked Questions (FAQ's).

Need more help? Do not return this product to the store.

Visit **www.rcainfiniteradio.com** to get the latest firmware updates and FAQ's.

Controls

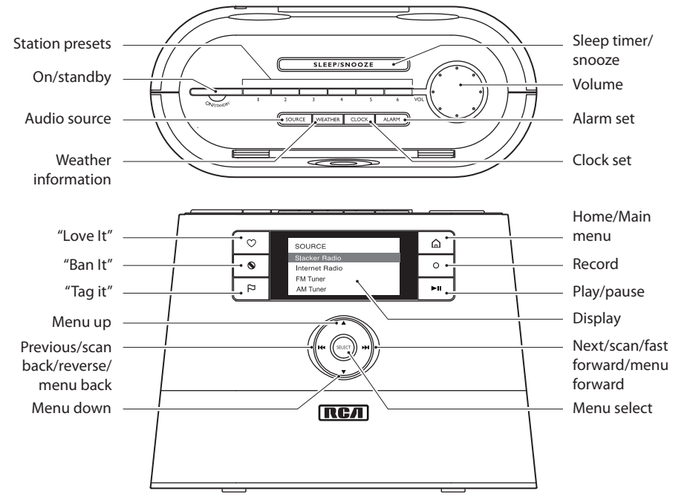

Rear panel connections

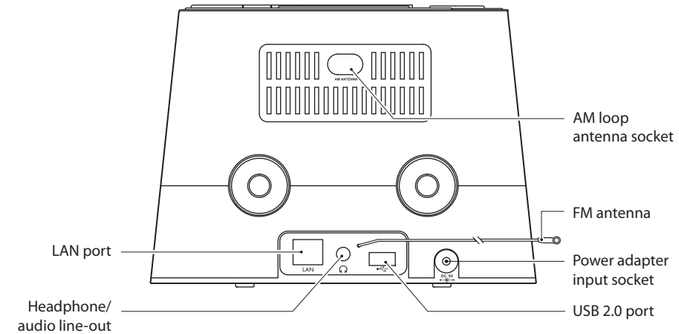

You can connect USB devices to the USB port: The radio can play MP3, WMA and RealAudio audio files stored on the connected USB device.

Slacker is a trademark of Slacker, Inc. in the United States and other countries.
RealAudio is a trademark or a registered trademark of RealNetworks, Inc.

Using the radio

General procedures

Turn on/off (standby) the radio	Press **ON/STANDBY**.
Choose an audio source	Press **SOURCE** to cycle through the audio sources (Slacker Radio, Internet Radio, FM/AM Tuner, Internal Memory, or USB Input).
Choose a preset radio station	Press **SOURCE** to choose the radio source (Slacker, Internet, FM, or AM), then press a preset button (**1**–**6**).
Assign the current radio station to a preset	Press and hold a preset button (**1**–**6**) until the radio beeps.
Display the menu while listening	Press ⌂.
Record the current AM/FM/Internet radio station	Press O. Press O again to stop recording.
Start the sleep timer	Press **SLEEP/SNOOZE**.
Add time or cancel the sleep timer	Press **SLEEP/SNOOZE** repeatedly.
Display the time	Press **CLOCK**.
Set the time	Press and hold **CLOCK** until the hour is highlighted. Press ⏮ or ⏭ to choose hours, minutes or AM/PM. Press ▲ or ▼ to change the time. Press **SELECT** to set the time.

Listening to FM/AM radio

Tune in an FM/AM radio station	Press **SOURCE** to choose FM or AM radio. Press and hold ⏮ or ⏭ until the radio beeps to auto-tune to the previous or next available station.
Step through the radio frequencies	Press ⏮ or ⏭.
Use the current station as the alarm sound	Press ⚐ to display the options menu. Press ▼ to choose **Send to Alarm** and then press **SELECT**.

Listening to Slacker™ radio

Choose a Slacker™ station	Press **SOURCE** to choose Slacker Radio. Press ▲ or ▼ to move up and down the menu options and press **SELECT** to choose the desired genre and station.
Start playing the selected station	Press **SELECT**.
Pause playback	Press ⏯. Press again to resume.
Skip to the next song	Press ⏭.
Mark the current song as a favorite	Press ♡.
Create a custom station based on the current artist	Press and hold ♡.
Ban the current song from the station	Press ⃠.
Ban the current artist from the station	Press and hold ⃠.
Use the current station as the alarm sound	Press ⚐ to display the options menu. Press ▼ to choose **Send to Alarm** and then press **SELECT**.

SLACKER RADIO
Custom Stations
Top Stations
Alternative
Blues

Listening to Internet radio

Choose an Internet radio station	Press **SOURCE** to choose Internet Radio. Press ▲ or ▼ to move up and down the menu options and press **SELECT** to navigate to the desired station.
Start playing the selected station	Press **SELECT**.
Mark the current station as a favorite	Press ♡ or press ⚐ to display the options menu. Press ▼ to choose **Add to Favorites** and then press **SELECT**.
Remove the current station from My Favorites	Press ⃠.
Use the current station as the alarm sound	Press ⚐ to display the options menu. Press ▼ to choose **Send to Alarm** and then press **SELECT**.

INTERNET RADIO
My Genres
My Favorites
Music
Talk

Playing recordings and audio files

Play a recording	Press **SOURCE** to choose Internal Memory. Press ▲ or ▼ to highlight a recording and press **SELECT**.
Play an audio file from a connected USB device	Press **SOURCE** to choose USB. Press ⏮ or ⏭ to exit or enter folders. Press ▲ or ▼ to highlight a file and press **SELECT** to start playback.
Pause playback	Press ⏯. Press again to resume.
Skip to the next recording/audio file	Press ⏭.
Skip to the previous recording/audio file	Press ⏮ within the first 3 seconds of the current recording/file.

Listening to Weather Forecasts

Listen to today's local forecast	Press **WEATHER** once.
Listen to 3-day local forecast	Press **WEATHER** twice.

For information on new and upcoming products and to register your new radio, visit **www.rcaaudiovideo.com**.

Audiovox Electronics Corp.,
150 Marcus Blvd, Hauppauge, NY 11788
© 2008 Audiovox Electronics Corp.
Trademark Registered
Marca Registrada
Marque Deposée
www.rcaaudiovideo.com

Changing Entertainment. **Again.**